

# SEIFERT X-ray Tubehousing

## ISOVOLT 320 / 7



### Application

Preferably radioscopic inspections of welds and castings for a wall thickness of more than 20 mm Fe.

### Features

- Direct radiating tube with double focus, bipolar, oil-cooled anode, axial high voltage connections
- Metal-ceramic tube with oblique anode and beryllium window
- Compatible with X-ray equipment of the ISOVOLT series
- Produced under ISO 9001 certified quality management system

### Options

- Centering and collimator attachment with laser centering device or telescopic rod
- Tube yokes
- Beam shutters
- Motorized limiting diaphragms

GE imagination at work



## Dose Rate within the Central Beam



The generation of radiation in an X-ray tube solely depends on the operation values, not on the make.

The dose rate relevant in practice and suitable for calculations of radiation

protection values is defined by national standards; thus the dose rate of the tubehousing ISOVOLT 320/7, measured at a distance of 1 m from the focal spot, amounts to 14.24 Sv/h at maximum tube voltage and maximum anode dissipation.

This value must not be used to assess biological effects.

The dose rate of the leakage radiation is < 10 mSv/h (1 rem/h).

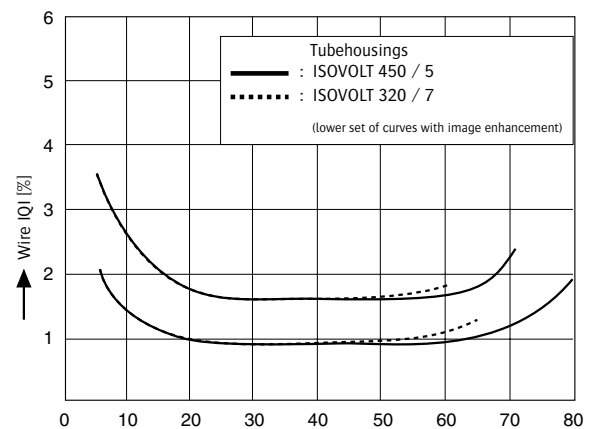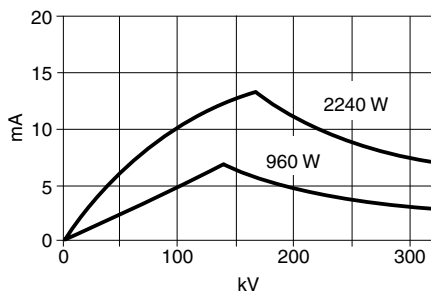

## Technical Data

Maximum tube voltage	320 kV	
	Large focal spot	Small focal spot
Maximum anode dissipation	2240 W	960 W
Tube current at max. tube voltage	7 mA	3 mA
Focal spot size (EN 12 543)	3.60 mm (~ 1.5 IEC 336)	1.90 mm (~ 0.8 IEC 336)
Emergent beam angle	20° x 40°	
Inherent filtration	7 mm Be	
High voltage connection	2 Plug sockets for rubber cone plugs R24 with optional quick-lock cable flanges	
Cooling oil flow rate	min. 17 l/min	
Cooling oil temperature	max. 50° C	
Cooling oil pressure	max. 7 bar	
Weight (with optional cable quick-lock)	35 kg (77 lbs)	
Dimensions	see drawing	

